


DISK & TAPE GENERATION



CITY GAMES

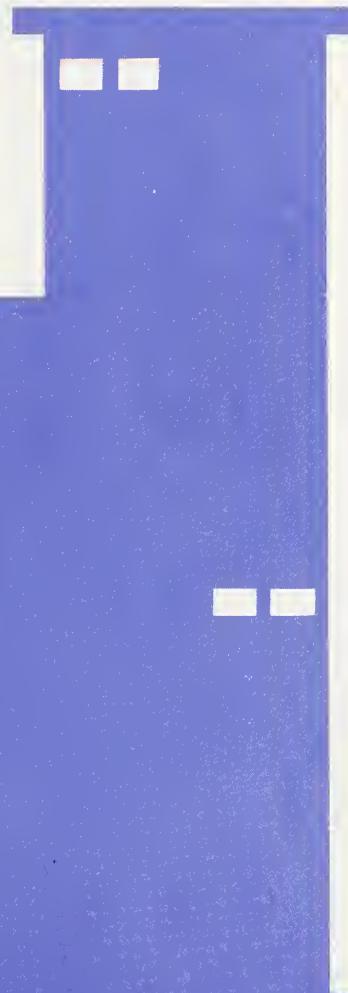

NTIS

National Technical Information Service
U.S. DEPARTMENT OF COMMERCE
P.O. Box 1551
Springfield, Va. 22151



Price of City Games
Computer Files Includes
Related Manuals

CITY GAMES

Disk and Tape Generation

CITY I Disk Generation

CITY I simulation model is stored on one 2315 disk cartridge that may be copied directly to another 2315 disk cartridge when two disk drives are available on the IBM 1130 Disk Operating System. The reproduction of a new disk copy consists of three steps which are performed by the same stand-alone utility program called, "Disk Cartridge Utilization Program," (DCIP).

DCIP prepares a new disk for use or provides a new ID to an old disk by initialization. With DCIP loaded, a request for SW0 TO INTLZ would allow the operator to turn on switch zero to initialize the new disk. For more details of this process, the reader is referred to the IBM 1130 Disk Monitor System, Version Z, Programmers and Operators Guide, pp. 9-10 to 9-19. Note that the disk ID is a four digit hexedecimal number between 0001 and 7FFF.

To copy the disk DCIP, a request for SW1 TO COPY would enable the copying to begin if the request is satisfied. More details are found on pp. 9-20 to 9-27 of the IBM Manual described above. Should the 1130 systems contain more than two disk drives, be sure that no other system cartridges are enabled during the copying process. If the 1130 system were to have both its current Monitor System programs and the CITY I system programs available simultaneously, the current Monitor System, i.e., Ver. 2, Mod 11, would attempt to update the old system programs which are contained in the CITY I system. During any use of the CITY I cartridge, insure that all other Monitor System Disks are turned off.

The DCIP compare procedure documented on pp. 9-40 and 9-41 of the IBM Manual is used to compare the source cartridge with the object cartridge. In addition, the Disk Utility Program, DUP, provides the DUMPCET option. This option provides a look at the Location Equivalence Tables of both disk cartridges.

The reader is referred to the CITY I Computer Operator's Manual for details on the CITY I System.

CITY IV Tape Generation

The CITY IV simulation model is totally contained on one 2400 magnetic tape that must be copied on a 2316 Disk Cartridge for use on the IBM 360 Operating System. Even the making of multiple tape copies can only be accomplished from the copy that is stored on the disk.

The production of a new tape copy consists of the following three steps using the IBM 360 O.S.

- a) The Labeling Process
- b) The Copying Process
- c) The Testing Process

The 360 O.S. Support Utility Program is involved in each of the processes, which can be compiled as steps in the same job or as separate jobs.

The Labeling program utilizes the utility program named, IEHINITT. The JCL listing in Figure 1 is all that is required for this step. This sequence is used each time one or more tapes are to be labelled. The only change is the last card or label control card. The label control card, "LABEL INITT SER = CTY401", is changed to reflect the new label. In other words, change CTY401 to CTY403 or any other six digit number preferably in this sequence. CTY401 is symbolic of the first tape copy of the CITY IV program. The only other change is with, "OWNER='GUILAND'". The program I.D. is truncated to a maximum of 10 characters including blanks within apostrophies. Thus, 'GUILAND' could be changed to 'P. SMITH'. A separate label control card is needed for each tape to be labelled.

IEHDASDR is used to dump the disk files to the standard labelled tape created above. The assumption is that the CITY IV disk labelled D00160 is available to O.S. 360. A description of the CITY IV installation is provided in the operators manual and a JCL listing of INSTAL describes the process of restoring a disk from the original tape. The tape cannot be made by a tape to tape copying process. The JCL listing of figure 2 describes the required process. The only changes would be the references to the tape. CTY401 must be changed to a new tape serial number. These changes are in the message to the operator:

```
MOUNT TAPE NTIS CTY401 TO
MOUNT TAPE NTIS CTY403
```

also

```
VOLUME = (PRIVATE, , SER = (CTY401)), etc. is changed to
VOLUME = (PRIVATE, , SER = (CTY403)), etc.
```

A repetition of this process is necessary for the production of each new tape copy.

The final step, testing of the tape copy, is not absolutely necessary but highly recommended. IEHLIST is the utility program used to dump the volume table of content of a disk. Therefore, we must first use INSTAL to restore a new scratch disk with the new tape copy. Refer to the Operator's Manual for the details of INSTAL. The JCL listing of figure 3 describes the use of IEHLIST to obtain the UTOC necessary. With this new UTOC, it would be relatively easy to compare it to the original UTOC of the CITY IV system as described in the Operator's Manual.

In most cases, if the copying process with IEHDASDR indicated that:

DUMP TO TAPE IS COMPLETE

HIGHEST RETURN CODE ENCOUNTERED WAS 00

there would be no need for more extensive testing.

The reader is referred to the CITY IV Computer Operator's Manual for more details concerning the CITY IV programs and JCL commands.

```

***** RBM-SYSTEM JCL LIBRARY *****
//*
//*      THE FIRST STEP LABEL2 LABELS THE TAPES WITH THE SERIAL
//*      NUMBERS PROVIDED.
//*
//LABEL2  EXEC  PGM=IEHINITT
//SYSPRINT DD  SYSOUT=A
//LABEL    DD  DCB=DEN=2,UNIT=,2400,1,DEFER*
//SYSIN    DD  *
LABEL    INIT  SFR=CTY402,OWNER='GUILAND',NUMBTAPF=1
/*
//*
//*
//** NAME
//** RBMTAPE
//*
//** FUNCTION
//**      RBMTAPE DUMPS THE DISK SPECIFIED BY DISKNUM=D00160 TO A TAPF
//**      OF YOUR CHOICE ON A 9 TRACK 800BPI DRIVE, AND SPFCIFIED BY
//**      TAPENUM=CTYNUM.
//*
***** THE NEXT CARD DEFINES THE DISK TO THE OPERATOR.
/*MESSAGE MOUNT DISK D00160
//*
//*      THE DISK D00160 IS THE CITY SYSTEM DISK.
//*      THE NEXT CARD DEFINES THE TAPE TO THE OPFRATOR.
/*MESSAGE MOUNT TAPE NTISCTY401
//*
//*      THE TAPE IS THE TAPE OF YOUR CHOICE.
//STEP1   EXEC  PGM=IEHDASDR
//SYSPRINT DD  SYSOUT=A
//THEDISK  DD  UNIT=2314,DISP=OLD,
//          VOLUME=)PRIVATE,,SER=D00160*          X
//TAPE    DD  UNIT=)2400*,DISP=OLD,DSNAME=TAPE,
//          VOLUME=)PRIVATE,,SFR=)CTY401**,DCB=)DEN=2*          X
//SYSIN    DD  *
DUMP    FROMDD=THEDISK,TODD=TAPE
/*

```

FIGURE 1

```

//RRMTAPE JOB (7800,ENG1,50,18),'GUILAND'      *,MSGLEV=1,CLASS=E      JOB 130
*** **** RBM-SYSTEM JCL LIBRARY ****
*** ****
*** NAME
*** RBMTAPE
*** ****
*** FUNCTION
***      RBMTAPE DUMPS THE DISK SPECIFIED BY DISKNUM=D00160 TO A TAPE
***      OF YOUR CHOICE ON A 9 TRACK 800BPI DRIVE, AND SPECIFIED BY
***      TAPENUM=CTYNUM.
*** ****
***** THE NEXT CARD DEFINES THE DISK TO THE OPERATOR.
***MESSAGE MOUNT DISK D00160
***      THE DISK D00160 IS THE CITY SYSTEM DISK.
***      THE NEXT CARD DEFINES THE TAPE TO THE OPERATOR.
***MESSAGE MOUNT TAPE NTISCTY401
***      THE TAPE IS THE TAPE OF YOUR CHOICE.
//STEP1  EXEC PGM=IEHDASDR
//SYSPRINT DD SYSOUT=A
//THEDISK DD UNIT=2314,DISP=OLD,          X
//          VOLUME=(PRIVATE,,SER=D00160)
//TAPE     DD UNIT=(2400),DISP=OLD,DSNAME=TAPE,          X
//          VOLUME=(PRIVATE,,SER=(CTY401)),DCB=(DEN=2)
//SYSIN    DD *
IEF236I ALLOC. FOR RRMTAPE STEP1
IEF237I 0E2 ALLOCATED TO SYSPRINT
IEF237I 133 ALLOCATED TO THEDISK
IEF237I 281 ALLOCATED TO TAPE
IEF237I 0C2 ALLOCATED TO SYSIN
IEF285I  SYS73016.T205719.RF000.RBMTAPE.R0001597    DELETED
IEF285I  VOL SER NOS=
IEF285I  SYS73016.T205719.RF000.RBMTAPE.R0001598    KEPT
IEF285I  VOL SER NOS= D00160.
IEF285I  TAPE          KEPT
IEF285I  VOL SER NOS= CTY401.
IEF285I  SYS73016.T205719.RF000.RBMTAPE.R0001599    DELETED
IEF285I  VOL SER NOS= .
IEF280E K 281,CTY401,RBMTAPE,STEP1
IEF373I STEP /STEP1 / START 74017.1826
IEF374I STEP /STEP1 / STOP 74017.1838 CPU    0MIN 48.84SEC MAIN 64K LCS  OK
//STEP2  EXEC PGM=IEHDASDR
//SYSPRINT DD SYSOUT=A
//THEDISK DD UNIT=2314,DISP=OLD,          X
//          VOLUME=(PRIVATE,,SER=D00160)
//TAPE     DD UNIT=(2400),DISP=OLD,DSNAME=TAPE,          X
//          VOLUME=(PRIVATE,,SER=(CTY402)),DCB=(DEN=2)
//SYSIN    DD *
IEF236I ALLOC. FOR RRMTAPE STEP2
IEF237I 0E2 ALLOCATED TO SYSPRINT
IEF237I 133 ALLOCATED TO THEDISK
IEF237I 281 ALLOCATED TO TAPE
IEF237I 0C3 ALLOCATED TO SYSIN
IEF285I  SYS73016.T205719.RF000.RBMTAPE.R0001600    DELETED
IEF285I  VOL SER NOS= .
IEF285I  SYS73016.T205719.RF000.RBMTAPE.R0001601    KEPT
IEF285I  VOL SER NOS= D00160.
IEF285I  TAPE          KEPT
IEF285I  VOL SER NOS= CTY402.

```

IEF285I SYS73016.T205719.RF000.RBMTAPE.R0001602 DELETED
IEF285I VCL SER NOS= .
IEF280F K 281,CTY402,RRBMTAPE,STEP2
IEF373I STEP /STEP2 / START 74017.1838
IEF374I STEP /STEP2 / STOP 74017.1849 CPU 0MIN 47.10SEC MATN 64K LCS OK
IEF375I JOB /PRBMTAPE / START 74017.1826
IEF376I JOB /RBMTAPE / STOP 74017.1849 CPU 1MIN 35.94SEC

FIGURE 2

01/17/74

SYSTEM SUPPORT UTILITIES --- IEHDASDR 20.2

DUMP FROMDD=THEDISK,TODD=TAPE

IEH806I DUMP TO DDNAME=TAPE IS COMPLETE.

IEH839I HIGHEST RETURN CODE ENCOUNTERED WAS 00

```
//RBMVTC JOB (7800,ENG1,10,1),'GUILAND           ',MSGLEVEL=1,CLASS=E      JOB 62
***MESSAGE D00160
//STEP EXEC PGM=IEHLIST
//SYSPRINT DD SYSOUT=A
//DD1 DD UNIT=2314,VOL=SER=D00160,DISP=OLD
//SYSIN DD *
//
IEF236I ALLOC. FOR RBMVTC   STEP
IEF237I OEO   ALLOCATED TO SYSPRINT
IEF237I 134   ALLOCATED TO DD1
IEF237I OC3   ALLOCATED TO SYSIN
IEF285I   SYS73163.T111131.RF000.RBMVTC.R0000167      DELETED
IEF285I   VOL SER NOS= .
IEF285I   SYS73163.T111131.RF000.RBMVTC.R000C168      KEPT
IEF285I   VOL SER NOS= D00160.
IEF285I   SYS73163.T111131.RF000.RBMVTC.R0000169      DELETED
IEF285I   VOL SER NCS= .
IEF373I STEP /STEP    / START 73163.1234
IEF374I STEP /STEP    / STOP   73163.1238 CPU    0MIN 23.52SEC MAIN  46K LCS  OK
IEF375I JOB /RBMVTC / START 73163.1234
IEF376I JOB /RBMVTC / STOP   73163.1238 CPU    0MIN 23.52SEC
```

FIGURE 3

PHOTOGRAPHIC DATA		1. Report No.	2.	3. Recipient's Accession No. COM-74-10703-2
Title and Subtitle CITY GAMES SYSTEM DISK & TAPE GENERATION		5. Report Date September 1973		
Author(s) John Moriarity		6.		
Performing Organization Name and Address National Bureau of Standards Department of Commerce Washington, D.C. 20234		8. Performing Organization Rept. No. 10. Project/Task/Work Unit No.		
Sponsoring Organization Name and Address National Technical Information Service 5285 Port Royal Road Springfield, Virginia 22151		11. Contract/Grant No. 13. Type of Report & Period Covered 14.		

Supplementary Notes

Abstracts This document contains the instructions for initializing duplicate disks for the CITY I model and duplicate tapes for the CITY IV model.

Key Words and Document Analysis. 17a. Descriptors

18. Identifiers/Open-Ended Terms

19. COSATI Field/Group

Availability Statement These implementation instructions are available only with the lease of the CITY I or CITY IV Games computer files COM 74-10701-COM 74-10702.		19. Security Class (This Report) UNCLASSIFIED	21. No. of Pages 12
		20. Security Class (This Page) UNCLASSIFIED	22. Price

